

wineo

THAT'S FLOORING

wineo 1500

PURLINE ORGANIC FLOORING

**BEST INGREDIENTS FOR
EVERY CHALLENGE**

CONTENT

Best ingredients	04
The ecuran organic formula	06
Product advantages	08
Further product advantages	10
Lifecycle cost analysis	12
Application areas	14
Formats	16
Surface structures	17
Product compositions	18

Collections

wineo 1500 wood XS L XL	20
wineo 1500 stone XL	36
wineo 1500 wood ∞	40
wineo 1500 chip ∞	46
wineo 1500 fusion XL fusion ∞	52

Special solutions

wineo 1500 special products	58
wineo 1500 customised	59
wineo 1500 acoustic ∞	60
wineo 1500 safety ∞	61
wineo 1500 rail	62
wineo 1500 sea	63

Accessories	64
Service	66
Awards and quality	68
Collection overview	70



BEST INGREDIENTS FOR CREATIVE RESULTS

Unbeatably ecological, limitlessly creative and extremely resilient – that's the new wineo 1500 collection.

wineo PURLINE organic flooring is probably the most ecological, elastic flooring available on the market. Without chlorine, plasticisers or solvents. wineo PURLINE organic flooring impresses not only with its incomparable sustainability, but also with its impressive hard-wearing features and range of designs.

BEST INGREDIENTS FOR BEST RESULTS

wineo PURLINE organic flooring is a high-quality polyurethane flooring solution made from the finest materials. The basis is provided by ecuran, a high-performance composite material that is manufactured primarily from plant-based oils such as canola oil or castor oil and naturally-occurring mineral components such as chalk. wineo PURLINE organic flooring impresses most of all with its sustainability, combined with its extreme hard-wearing features; furthermore, it is truly made in Germany throughout all of its production stages.



CANOLA OR CASTOR OIL

Natural and sustainable – the perfect replacement for plasticisers and crude oil

CHALK

Harmless and particularly fine – an ideal filler



Made with

ecuran

your flooring upgrade

The unique bio-polyurethane from the Windmüller house now has a name: ecuran

ecuran is the sustainable high-performance composite material for sophisticated flooring solutions. It is based on “bio-polyurethane” which is manufactured to a large extent from plant-based oils such as canola oil or castor oil and naturally occurring mineral components such as chalk. Detailed information regarding ecuran can be found here: www.ecuran.de

BEST INGREDIENTS FOR MAXIMUM PERFORMANCE

Sustainable can also be particularly efficient – wineo 1500 not only consists of the best ingredients, but also withstands a great deal. It's simply high-efficiency flooring for heavily stressed areas of application.

5 X BETTER



EXTREMELY DURABLE

Even after 25,000 crossings with 500 kg at 6 km/h, wineo 1500 seems totally unimpressed. This was proven by Bielefeld University of Applied Sciences (FH), which even certified the product's suitability for deployment in the light industry. In addition, the high-efficiency flooring excels with an outstanding residual indentation behaviour of ~ 0.05 mm in accordance with EN ISO 24343-1.



OUTSTANDINGLY UV-RESISTANT

Compared with other floorings in its class, wineo 1500 has very high light fastness of ≥ 7 . EN ISO 105 – B02 therefore certifies the presence of excellent UV resistance.



PARTICULARLY TEMPERATURE STABLE

wineo 1500 can even withstand heavy spells of heat exposure, for example when there are changes in the room temperature. According to EN ISO 23999, it has a high level of thermostability.



ABSOLUTELY ODOUR NEUTRAL

The certification agency TÜV Proficert confirms that wineo 1500 is absolutely odour neutral during installation and when in use. There are no disturbing odours.



EXCEPTIONALLY ECONOMICAL

Up to 30 % savings for the cost of cleaning and resources – thanks to its extremely low lifecycle costs, wineo 1500 is highly economical. This was certified by the Pfiff Institute (page 12).



BEST INGREDIENTS FOR OPTIMUM ATTRIBUTES

wineo 1500 not only looks good in every situation, but can also withstand a great deal. That's convincing.



EASY CARE

The polyurethane surface makes the wineo 1500 **easy to clean**.



MINIMAL SMOKE

Even in the event of fire, there are **no toxic gases** and hardly any smoke.



QUIET

The soft surface ensures pleasantly **quiet acoustics**.



SUITABLE FOR DAMP AREAS

wineo 1500 is ideal for damp areas, such as kitchens or bathrooms as it does not swell on contact with water.



WARM TO THE FEET

Feels pleasantly warm and is ideally suited for lying, playing and living on.



GENTLE ON THE ANKLES

The elastic surface is gentle on the joints.



SUITABLE FOR UNDERFLOOR HEATING

Installed over underfloor heating, the wineo 1500 provides **additional warmth**.



NON-SLIP

The tested surface ensures **safety with every step**.

BEST INGREDIENTS FOR LOW COSTS

Resistant to chemical and mechanical stresses, environmentally compatible and particularly easy to clean: wineo PURLINE organic flooring's lifecycle costs are considerably lower than those of all other conventional flooring solutions currently on the market. This has also been confirmed by the Memmingen-based Pfiff Institute for applied industrial cleaning technology.


This is particularly evident in heavily frequented areas such as medical institutions, department stores, schools, airports or other public buildings. wineo PURLINE organic flooring proves to be particularly hard-wearing and economical.

WHAT THE PFIFF INSTITUTE HAD TO SAY:

- Conventional cleaning agents can be used without problems
- The closed surface makes cleaning particularly easy
- Additional polishing or initial care is unnecessary
- All surface disinfectants can be used
- Various tests demonstrate an effective disinfectability
- Contrast agents normally used in hospitals do not discolour the organic PU flooring
- No impressions left by furniture after a brief regeneration
- No visible wear and tear resulting from mechanical stresses
- Extremely high resistance to direct sunlight

Source: Pfiff Institute for industrial cleaning technology, January 2013

PURLINE
ORGANIC
FLOORING

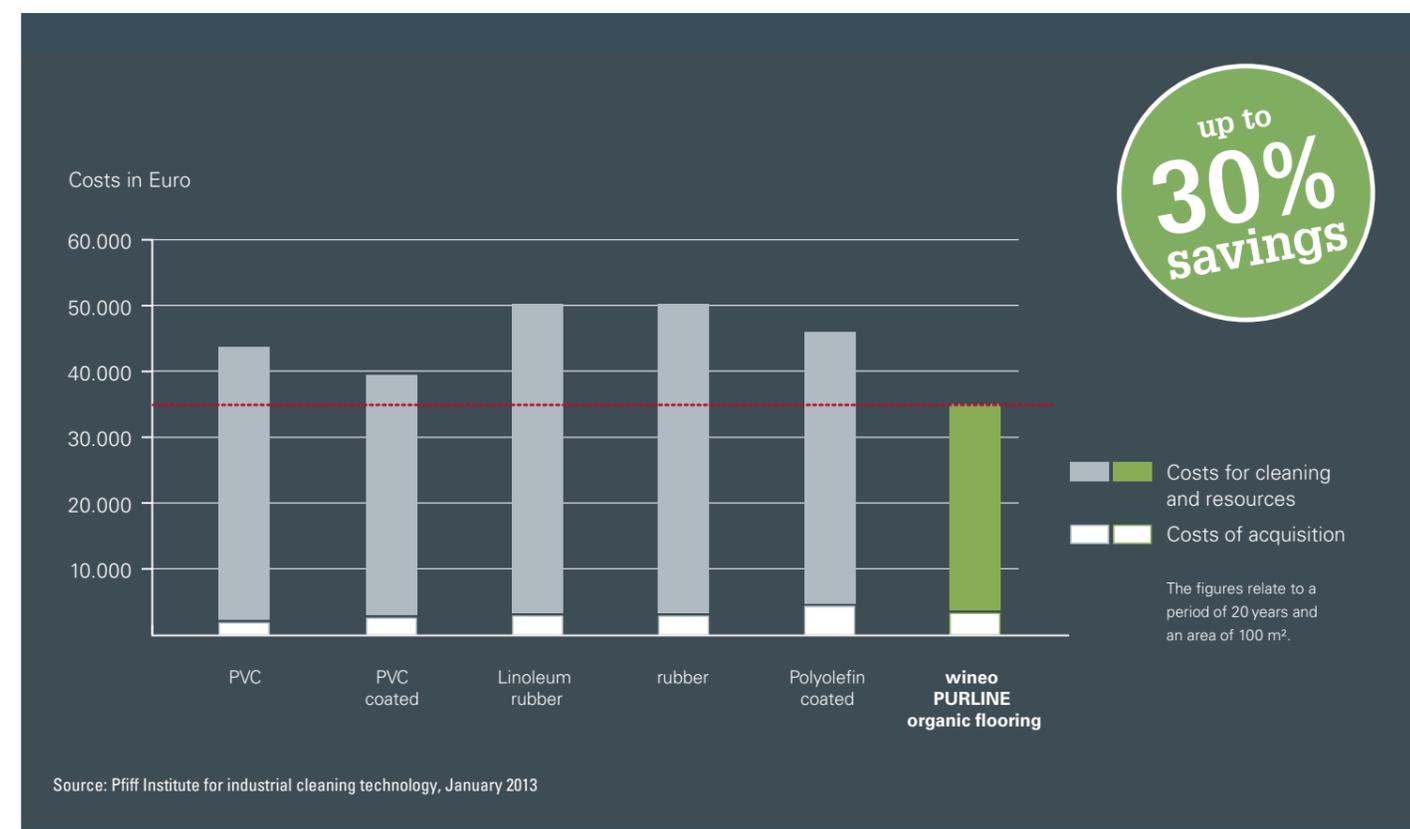

BEST INGREDIENTS FOR EVERY AREA OF APPLICATION

The fitting characteristic for every area of application. Be it special standards of hygiene, resilience or design, wineo 1500 is always a perfect partner and convinces by virtue of its special and diverse advantages in all areas.



RECOMMENDED FOR
HOTEL + HOSPITALITY

RECOMMENDED FOR
RETAIL + FAIR

RECOMMENDED FOR
HEALTH + CARE

RECOMMENDED FOR
PUBLIC + EDUCATION

THE SUITABLE FORMAT FOR EVERY APPLICATION

Roll format or practical planks? Both have their individual advantages, are extremely practical for renovation work due to their low structural height of 2.5 mm and have ideal installation attributes.



ORGANIC FLOORING IN ROLL FORMAT

The flooring for large surfaces – delivered in the standard format 20 x 2 m and to be cut simply using a hook blade. For the ideal installation we recommend fibre-based adhesives.



- chip ∞
- wood ∞
- fusion ∞
- acoustic ∞
- safety ∞



ORGANIC FLOORING IN PLANK AND TILE FORMAT

wineo 1500 as a plank or tile solution is an ideal choice when it comes to individual designs. The XS, L and XL formats can be installed together and thereby offer maximum scope for design options.

wood XS

600 x 100 mm

wood L

1200 x 200 mm

wood XL

1500 x 250 mm

stone XL | fusion XL

1000 x 500 mm

THE ORGANIC FLOORING WITH STRUCTURE

wineo 1500 has a variety of surfaces that are coordinated with the designs. The embossed stone and wood structures provide maximum authenticity. Reference to the respective surfaces can be found under the decor illustration on the following collection pages.



Elegant wood structure



Fine wood structure



Pine structure



Slate structure



Soft structure



THE ORGANIC FLOORING FOR MORE SAFETY

Thanks to its special surface texture, the R10 offers maximum slip resistance and safe standing in every situation.

R10

PRODUCT COMPOSITIONS

Of course the inner values are also crucial. wineo 1500 is convincing in these areas too. With the best ingredients based on the ecuran organic formula. The suitable insulation mat for maximum walking noise reduction is available as an optional extra.

wineo 1500

wood XS | wood L | wood XL | stone XL | wood ∞ | chip ∞ | fusion ∞ | fusion XL | safety



- 1 Top element**
PU-top layer with surface structure , decor paper & stabilisation with ecuran
- 2 Base layer**
ecuran high-performance composite material
- 3 Backing**
integrated FleeceTEC-System® for easy and comfortable installation

wineo 1500

acoustic ∞



- 1 Top element**
PU-top layer with surface structure , decor paper & stabilisation with ecuran
- 2 Base layer**
ecuran high-performance composite material
- 3 Insulation mat**
with integrated insulation mat for an impact sound reduction up to 17 dB

Further information regarding wineo 1500 acoustic ∞ can be found on page 60.





**DAILY
BREAD
&
MORE**

SPECIALTIES		
Chai Tea Latte	5.0 ml	5.0 ml
Hot Chocolate	42.55	45.58
White Hot Chocolate	42.55	42.62
Hot Tea	41.52	41.72
Iced Tea	41.45	41.72
Steamed Milk	42.75	45.52

NON-NEED CONVERSION CHART		
348 ml = small = 12 oz.		
490 ml = medium = 16 oz.		
570 ml = large = 20 oz.		

FRESHLY ROASTED, GRAVITY EXTRACTED COFFEE		
HouseHouse Drazil	348 ml	450 ml
Deep	41.62	41.62
Café au Lait	41.55	42.22
Iced Coffee	41.45	42.22

Bites & Bites (C = Cheese, H = Ham, N = Nuts, O = Onion)		
Old School Combo		42.55
Traditional	41.55	41.55
Classic	41.55	41.55
Plum	41.55	41.55
Apple	41.55	41.55
Blueberry	41.55	41.55
Strawberry	41.55	41.55
Raspberry	41.55	41.55
Blackberry	41.55	41.55
Orange	41.55	41.55
Lemon	41.55	41.55
Lime	41.55	41.55
Vanilla	41.55	41.55
Chocolate	41.55	41.55
Vanilla Caramel	41.55	41.55
Vanilla Bean	41.55	41.55
Vanilla Custard	41.55	41.55
Vanilla Panna Cotta	41.55	41.55
Vanilla Ice Cream	41.55	41.55
Vanilla Sauce	41.55	41.55
Vanilla Syrup	41.55	41.55
Vanilla Whipped Cream	41.55	41.55
Vanilla Yogurt	41.55	41.55
Vanilla Zucchini Bread	41.55	41.55
Vanilla Zucchini Muffin	41.55	41.55
Vanilla Zucchini Pancake	41.55	41.55
Vanilla Zucchini Waffle	41.55	41.55



wineo 1500
wood XS | L | XL

BEST INGREDIENTS FOR CREATIVE RESULTS


wineo 1500 wood convinces with 36 modern and classic wood designs. The three attractive formats offer a range of creative installation options, which range from fish bone to extravagant installation designs.

wineo 1500 wood XS

Installation type: Glue
Format: 600 × 100mm
Product thickness: 2.5mm
Content / box: 28/1.68m²



Installed area with the Garden Oak and Island Oak Moon example.



Pure White | PL025C | Elegant wood structure Skirting board 14.5/50: 30060432



Pure Black | PL194C | Elegant wood structure Skirting board 14.5/50: 30060598



Garden Oak | PL005C | Elegant wood structure Skirting board 14.5/50: 30060411



Island Oak Moon | PL045C | Elegant wood structure Skirting board 14.5/50: 30060519

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200mm
Product thickness: 2.5mm
Content / box: 20/4.8m²



Wild Wood (Installed area) | PL100C | Soft structure

Skirting board 14.5/50: 30060614



Uptown Pine (Installed area) | PL083C | Fine wood structure

Skirting board 14.5/50: 30060613



Noble Elm (Installed area) | PL081C | Fine wood structure

Skirting board 14.5/50: 30060611

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200mm
Product thickness: 2.5mm
Content / box: 20/4.8m²



Installed area Canyon Oak with the Canyon Oak Sand example.



Canyon Oak Sand | PL075C | Elegant wood structure

Skirting board 14.5/50: 30060606



Canyon Oak Honey | PL076C | Elegant wood structure

Skirting board 14.5/50: 30060607

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200mm
Product thickness: 2.5mm
Content / box: 20/4.8m²



Installed area Classic Oak with the Classic Oak Winter example.



Classic Oak Winter | PL074C | Elegant wood structure

Skirting board 14.5/50: 30060605



Classic Oak Autumn | PL073C | Elegant wood structure

Skirting board 14.5/50: 30060604



Classic Oak Summer | PL072C | Elegant wood structure

Skirting board 14.5/50: 30060603



Classic Oak Spring | PL071C | Elegant wood structure

Skirting board 14.5/50: 30060602

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200mm
Product thickness: 2.5mm
Content / box: 20/4.8m²



Installed area Supreme Oak with the Supreme Oak Grey example.



Supreme Oak Grey | PL070C | Fine wood structure

Skirting board 14.5/50: 30060601



Supreme Oak Silver | PL069C | Fine wood structure

Skirting board 14.5/50: 30060600



Supreme Oak Natural | PL068C | Fine wood structure

Skirting board 14.5/50: 30060599

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200mm
Product thickness: 2.5mm
Content / box: 20/4.8m²



Polar Pine (Installed area) | PL082C | Pine structure

Skirting board 14.5/50: 30060612



Pure Pine (Installed area) | PL079C | Pine structure

Skirting board 14.5/50: 30060610

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200mm
Product thickness: 2.5mm
Content / box: 20/4.8m²



Mixed Decors = various plank colours in one box



Silver Pine Mixed (Installed area) | PL078C | Pine structure

Skirting board 14.5/50: 30060609



Golden Pine Mixed (Installed area) | PL077C | Pine structure

Skirting board 14.5/50: 30060608

**BEST INGREDIENTS FOR
CREATIVE RESULTS**

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Crystal Pine (Installed area) | PL098C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060628



Native Ash (Installed area) | PL099C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060629



Crafted Oak (Installed area) | PL080C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060630

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Fashion Oak with the Fashion Oak Cream example.



Fashion Oak Cream | PL092C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060622



Fashion Oak Natural | PL091C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060621



Fashion Oak Grey | PL093C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060623

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Village Oak with the Village Oak Grey example.



Village Oak Grey | PL089C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060620



Village Oak Cream | PL087C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060618



Village Oak Brown | PL088C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060619

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Queen's Oak with the Queen's Oak Pearl example.



Queen's Oak Pearl | PL097C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060627



Queen's Oak Amber | PL096C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50:30060626

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Western Oak with the Western Oak Cream example.



Western Oak Cream | PL094C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060624



Western Oak Desert | PL095C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060625

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Royal Chestnut with the Royal Chestnut Grey example.



Royal Chestnut Grey | PL084C | Fine wood structure | all-round V4 joint

Skirting board 14.5/50: 30060615



Royal Chestnut Desert | PL085C | Fine wood structure | all-round V4 joint

Skirting board 14.5/50: 30060616



Royal Chestnut Mocca | PL086C | Fine wood structure | all-round V4 joint

Skirting board 14.5/50: 30060617



wineo 1500
stone XL

BEST INGREDIENTS FOR MORE STYLE

Classic marble, modern copper and varying industrial designs come together with stylish decors to form the wineo 1500 stone XL. In the modern format 1000 x 500 mm the tiles create a very special atmosphere.

wineo 1500 stone XL

Installation type: Glue
Format: 1000 × 500 mm
Product thickness: 2.5 mm
Content / box: 10/5 m²



Timeless Travertine (Installed area) | PL106C | Soft structure



Urban Copper (Installed area) | PL103C | Soft structure



Just Concrete (Installed area) | PL101C | Soft structure



Carpet Concrete (Installed area) | PL102C | Soft structure

wineo 1500 stone XL

Installation type: Glue
Format: 1000 × 500 mm
Product thickness: 2.5 mm
Content / box: 10/5 m²



Raw Industrial (Installed area) | PL104C | Soft structure



Grey Marble (Installed area) | PL105C | Soft structure



Scivaro Slate (Installed area) | PL038C | Slate structure



White Marble (Installed area) | PL090C | Soft structure



Bē

wellness & spa
beautycare

Berlin
Bielefeld
Frankfurt
Köln
Leipzig
München
Potsdam
Stuttgart



wineo 1500
wood ∞

BEST INGREDIENTS FOR GOOD BUSINESS

Warm, natural, primal – wineo 1500 wood ∞ includes 8 wood designs for every requirement. From classic oak and walnut to exotic wood designs for a warm and pleasant atmosphere.

wineo 1500 wood ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²



Floating Wood Snow | PLR133C | Soft structure



Floating Wood Sand | PLR134C | Soft structure

wineo 1500 wood ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²



Napa Walnut Cream | PLR135C | Fine wood structure



Napa Walnut Brown | PLR136C | Fine wood structure

wineo 1500 wood ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²



Halifax Oak | PLR036C | Fine wood structure



Pacific Oak | PLR037C | Fine wood structure

wineo 1500 wood ∞


Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²



Cottage Oak | PLR038C | Fine wood structure



Missouri Oak | PLR039C | Fine wood structure

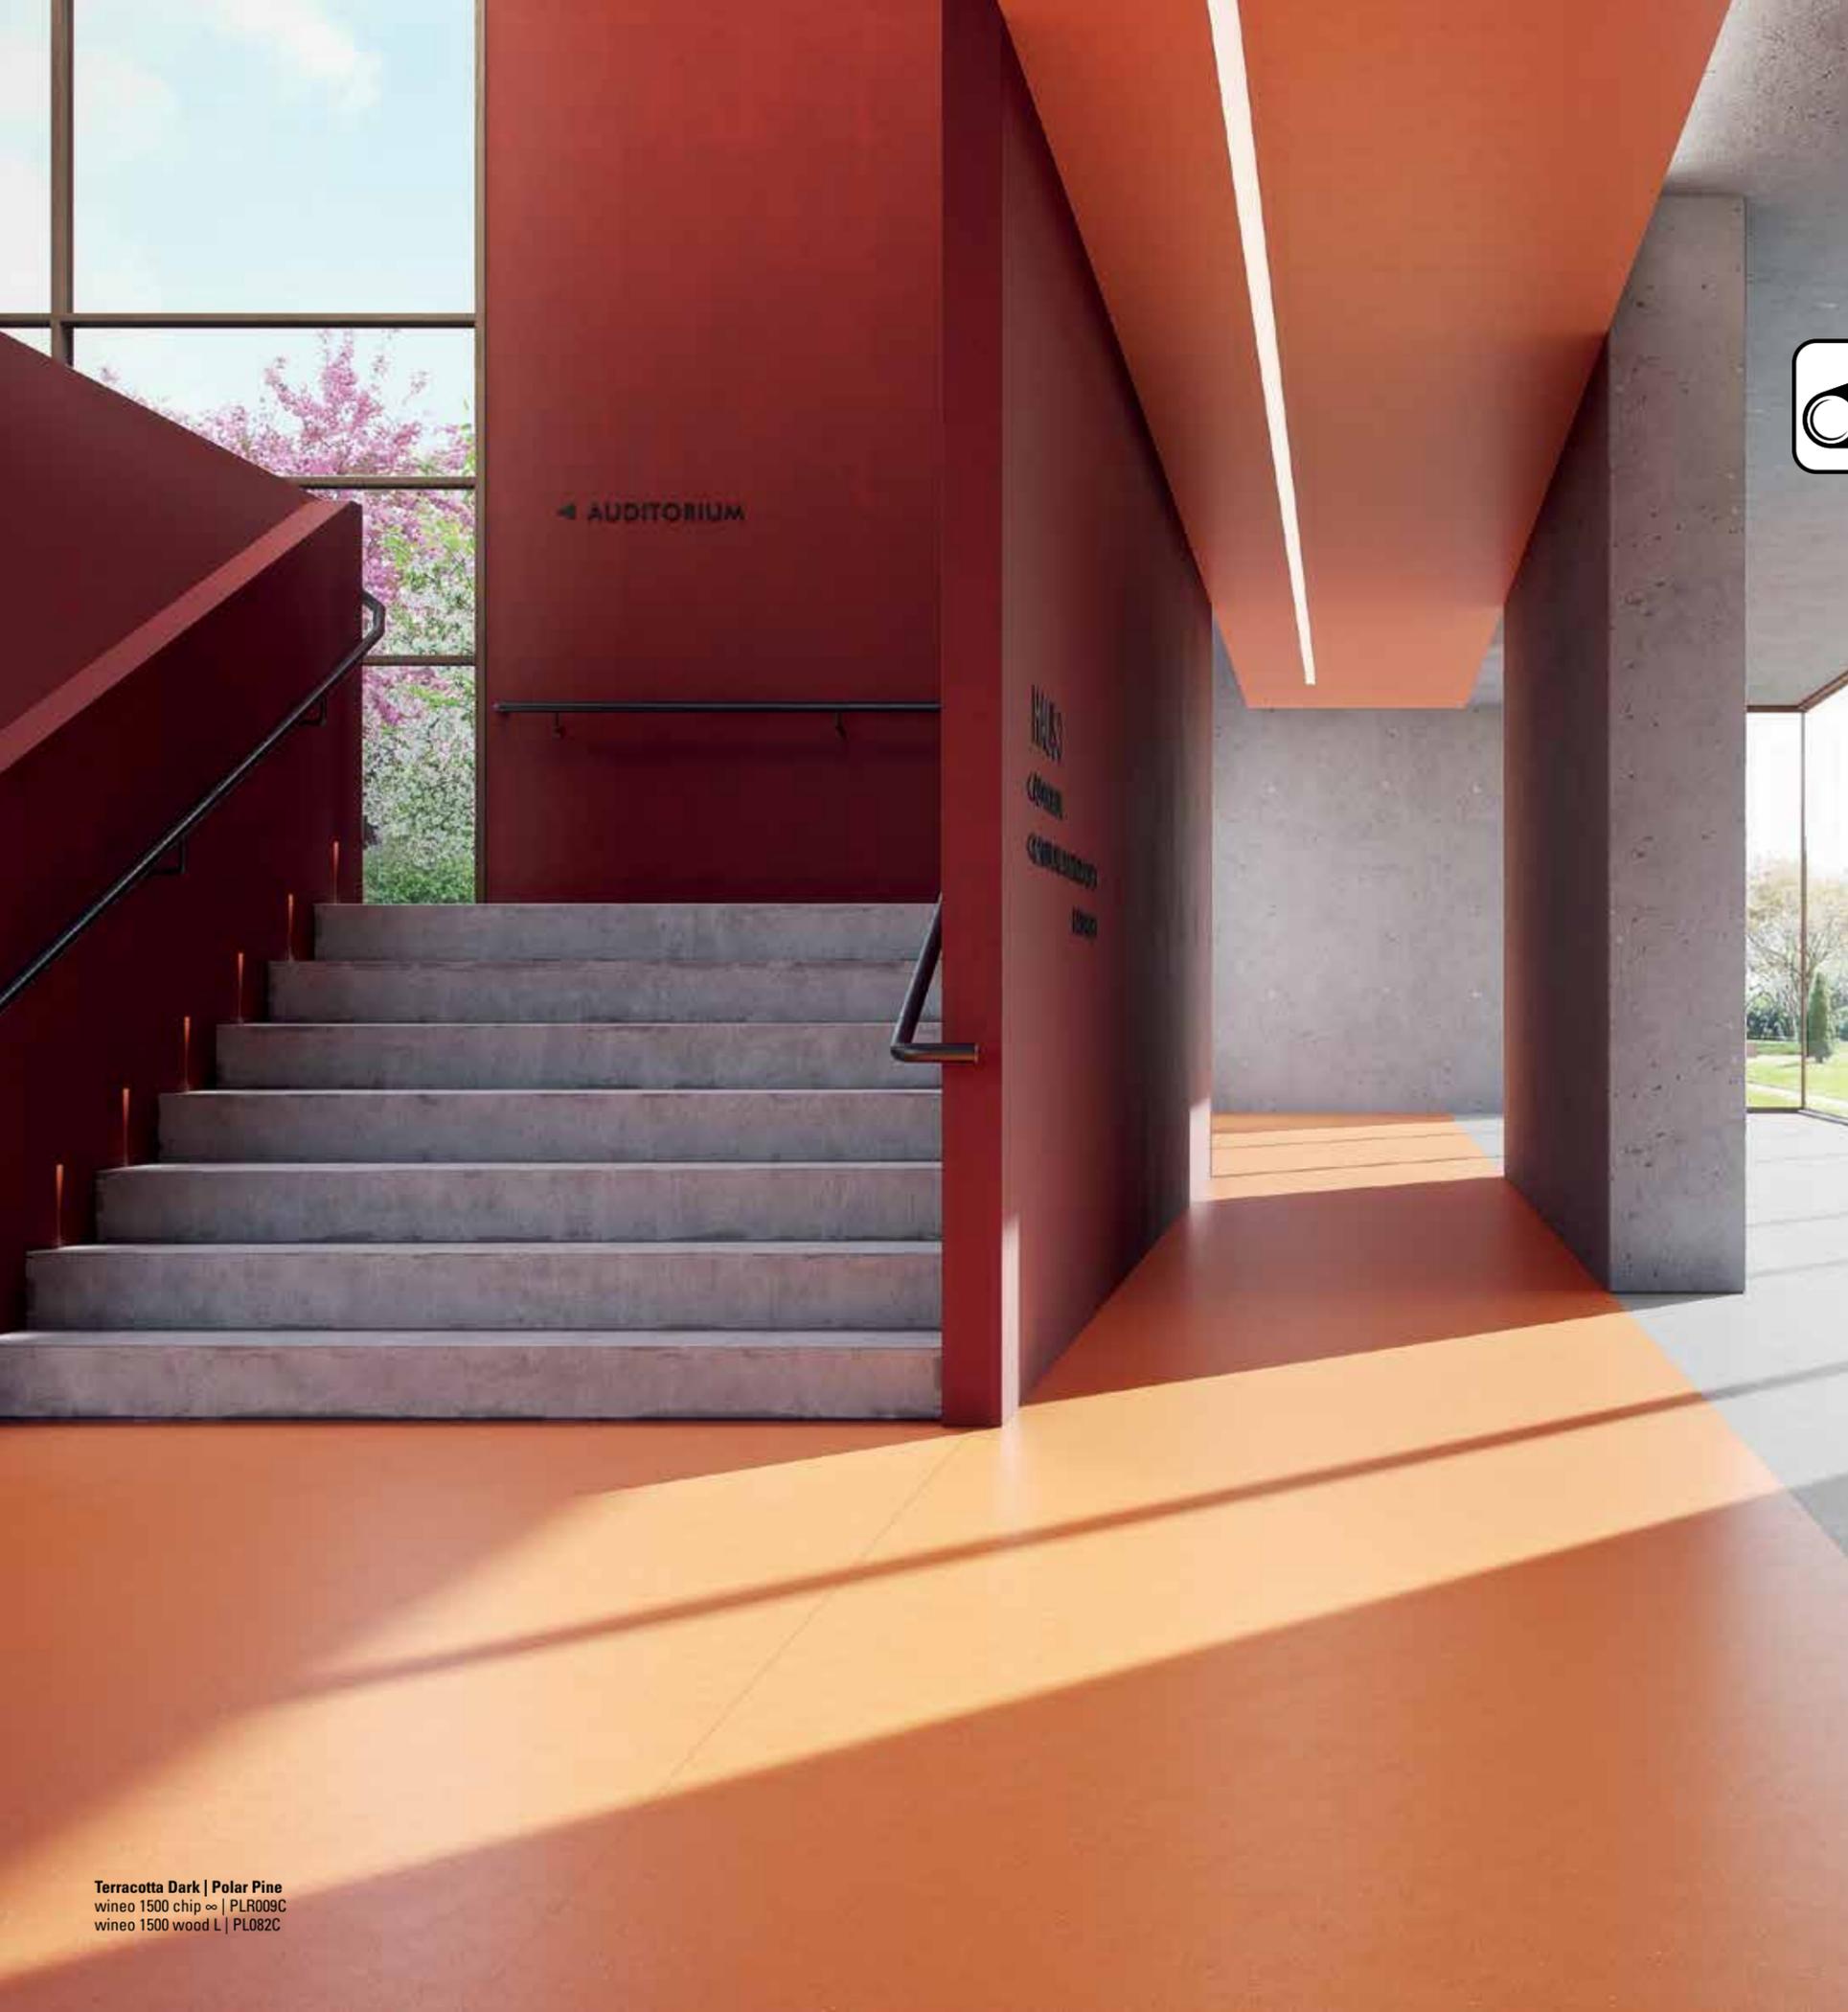


wineo 1500
chip ∞

BEST INGREDIENTS FOR CONVINCING HIGHLIGHTS

Whether plainly coloured, strongly or slightly chipped, in muted beige and grey tones or as a colourful highlight: With 24 designs the wineo 1500 chip ∞ effectively make its mark.

wineo 1500 chip ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²

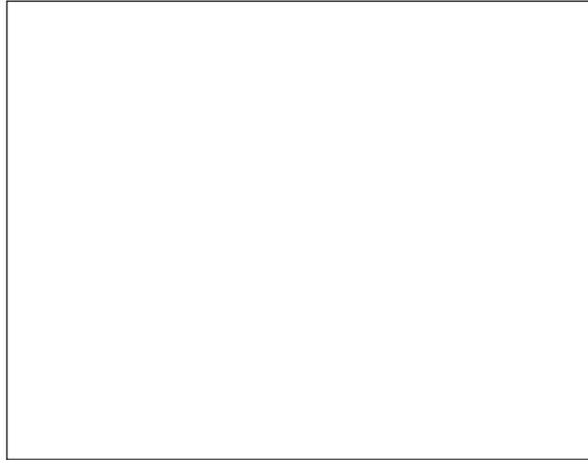

Pure White | PLR025C | Soft structure



Pure White Stars | PLR123C | Soft structure



Sinai Sand | PLR002C | Soft structure



Sinai Sand Stars | PLR130C | Soft structure




Melange | PLR003C | Soft structure



Cappuccino | PLR004C | Soft structure

wineo 1500 chip ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²

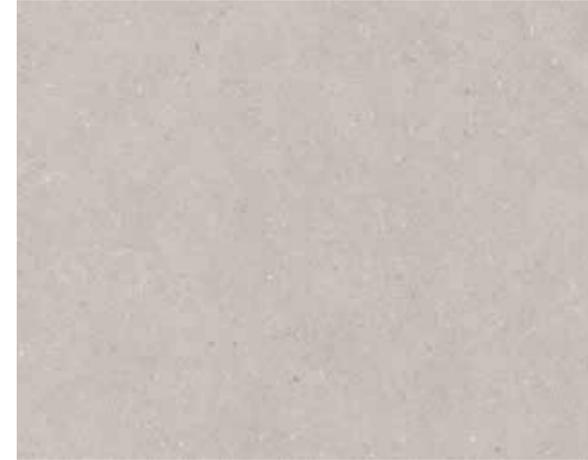


Light Grey | PLR021C | Soft structure



Steel Grey | PLR023C | Soft structure



Silver Grey | PLR022C | Soft structure

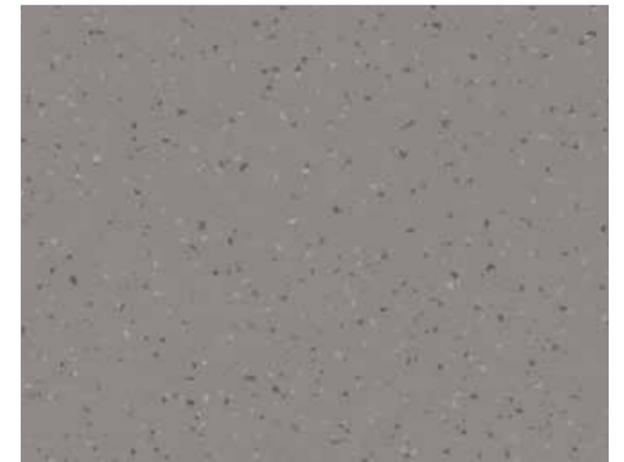

Silver Grey Stars | PLR124C | Soft structure



Midnight Grey | PLR024C | Soft structure




Midnight Grey Stars | PLR126C | Soft structure

wineo 1500 chip ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²



Honey Mustard | PLR128C | Soft structure

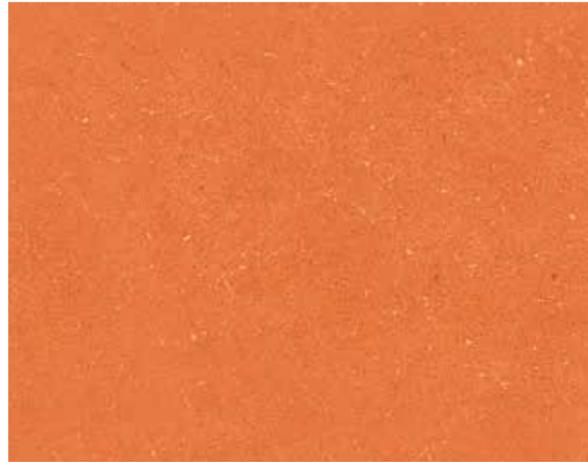

Terracotta Dark | PLR009C | Soft structure



Red Rubin | PLR011C | Soft structure



Apple Green | PLR185C | Soft structure



Racing Green | PLR019C | Soft structure



Jungle Green | PLR018C | Soft structure

wineo 1500 chip ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²




Purple Rain | PLR013C | Soft structure



Summer Sky | PLR014C | Soft structure



Navi Blue | PLR129C | Soft structure

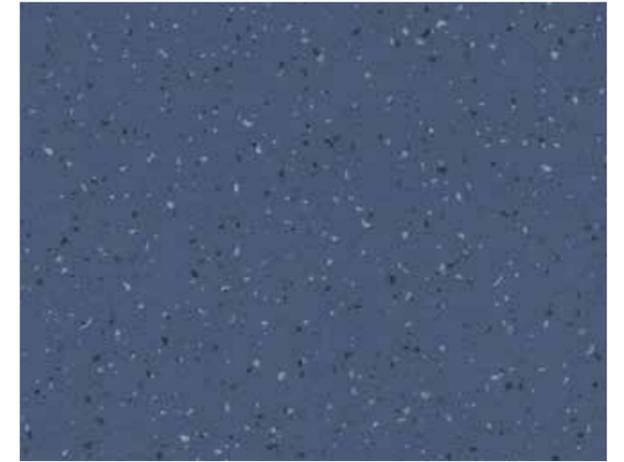

Navi Blue Stars | PLR131C | Soft structure



Denim Blue Stars | PLR132C | Soft structure



Pure Black Stars | PLR127C | Soft structure



wineo 1500
fusion ∞ | fusion XL

BEST INGREDIENTS FOR SUITABLE DESIGNS

Especially adapted to the needs of architects and planners, the wineo 1500 fusion offers the matching grey tone for all furnishing concepts. Whether light or dark tones, summerly warm or pleasantly cool – the 16 different designs distinguish themselves and integrate perfectly into the existing colour concept of your room.

wineo 1500 fusion is available as a tile (fusion XL) and as a roll (fusion ∞). Thanks to our **match guarantee** you will always find the matching decor even for particularly challenging furnishing elements. Guaranteed.

cool

pure

warm

bright

one



one

two



two

three



three

four



four

BEST INGREDIENTS FOR CLASSY HIGHLIGHTS

The two graphic decors, flowers and ornaments, provide extra highlights. These were colour composed based on the decors in the fusion matrix. In this way, every colour row develops a light and a dark decor variant that you can combine perfectly with all decors from the fusion collection.

We would be happy to advise you.






cool

pure



warm

bright

flowers

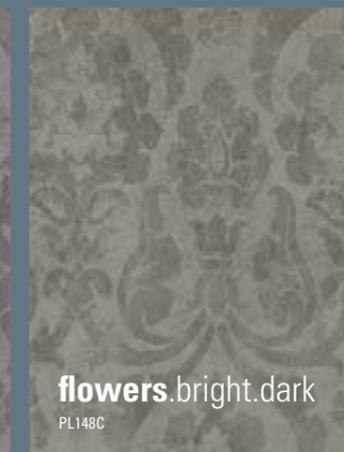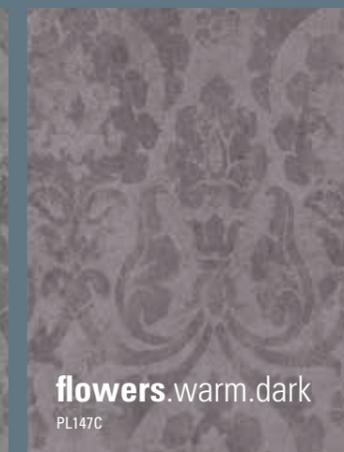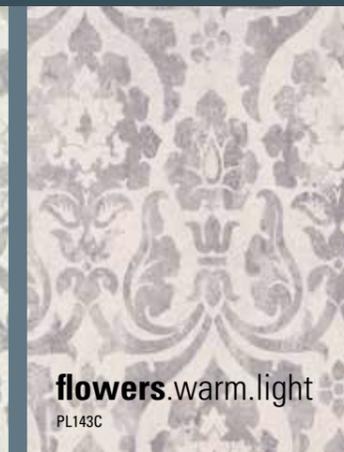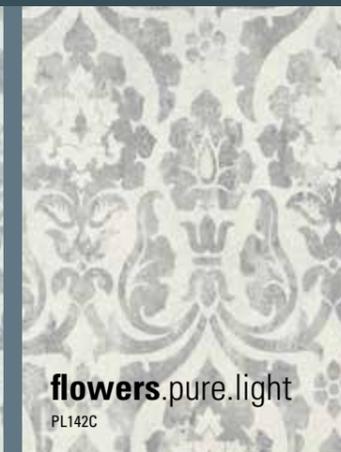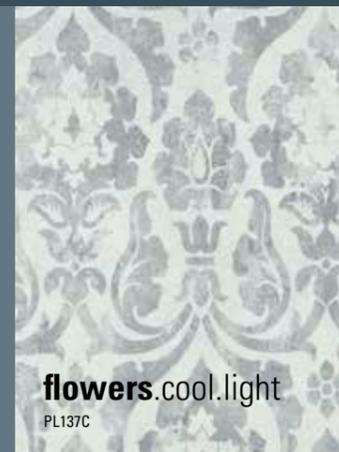

ornaments

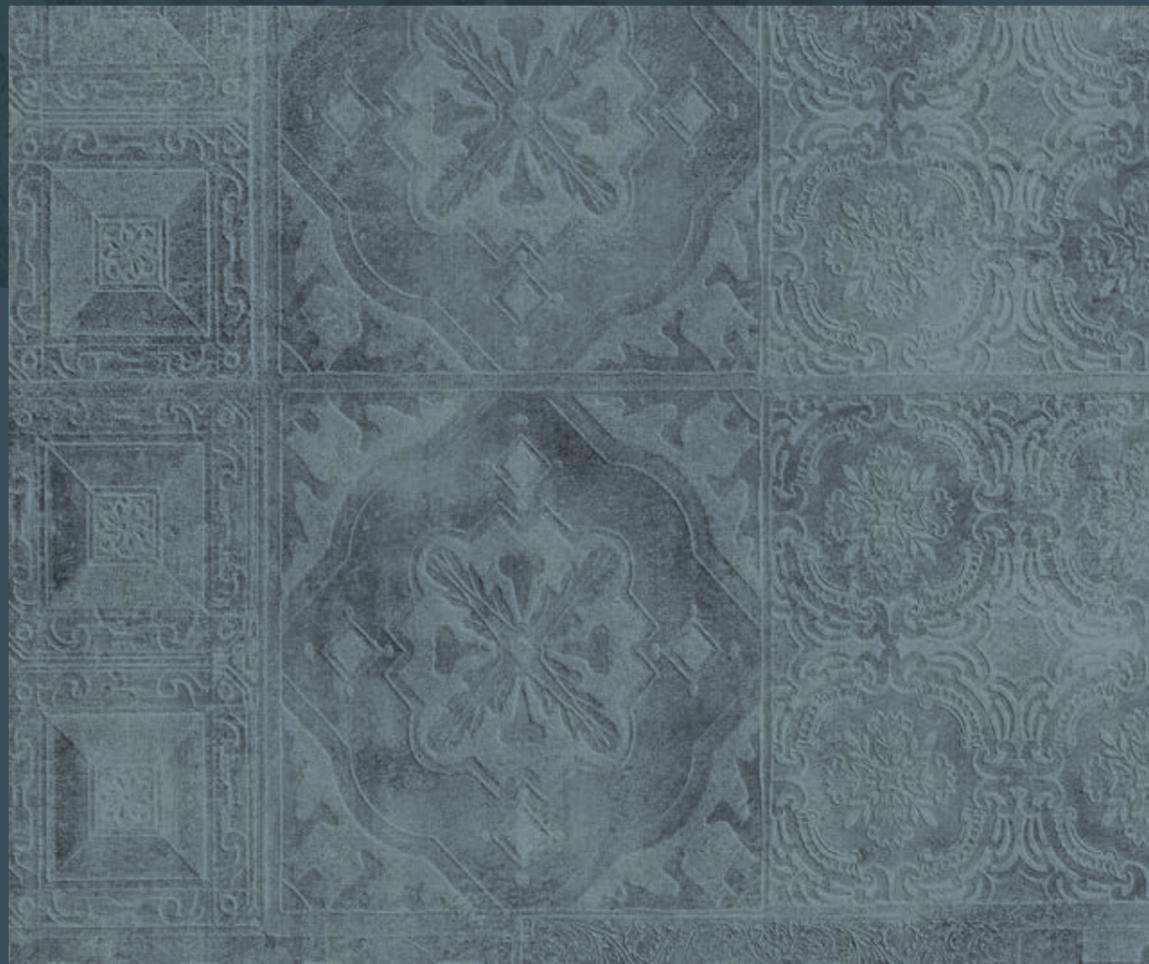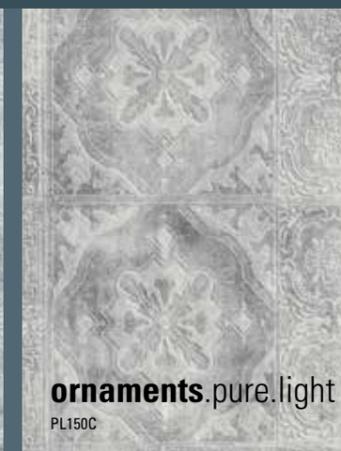

BEST INGREDIENTS FOR SPECIAL REQUIREMENTS


Special assignments require special solutions. That is why wineo 1500 is also available in other special variants – always individually made to measure for the respective area of application.

PRODUCT	wineo 1500	wineo 1500 acoustic ∞	wineo 1500 customised	wineo 1500 safety ∞	wineo 1500 sea	wineo 1500 rail
AREAS OF APPLICATION						
HEALTH + CARE	✓	✓	✓	✓		
HOTEL + HOSPITALITY	✓	✓	✓	✓		
PUBLIC + EDUCATION	✓	✓	✓	✓		
RETAIL + FAIR	✓	✓	✓	✓		
MARITIME			✓		✓	
RAILWAY			✓			✓
HOME + LIVING	✓		✓			



wineo 1500 customised


Be it the company logo in the conference room or abstract colours and patterns in the studio, with wineo 1500 customised your creativity will know no bounds. Design the floor you have always wanted, thereby creating your own unique and valuable product.

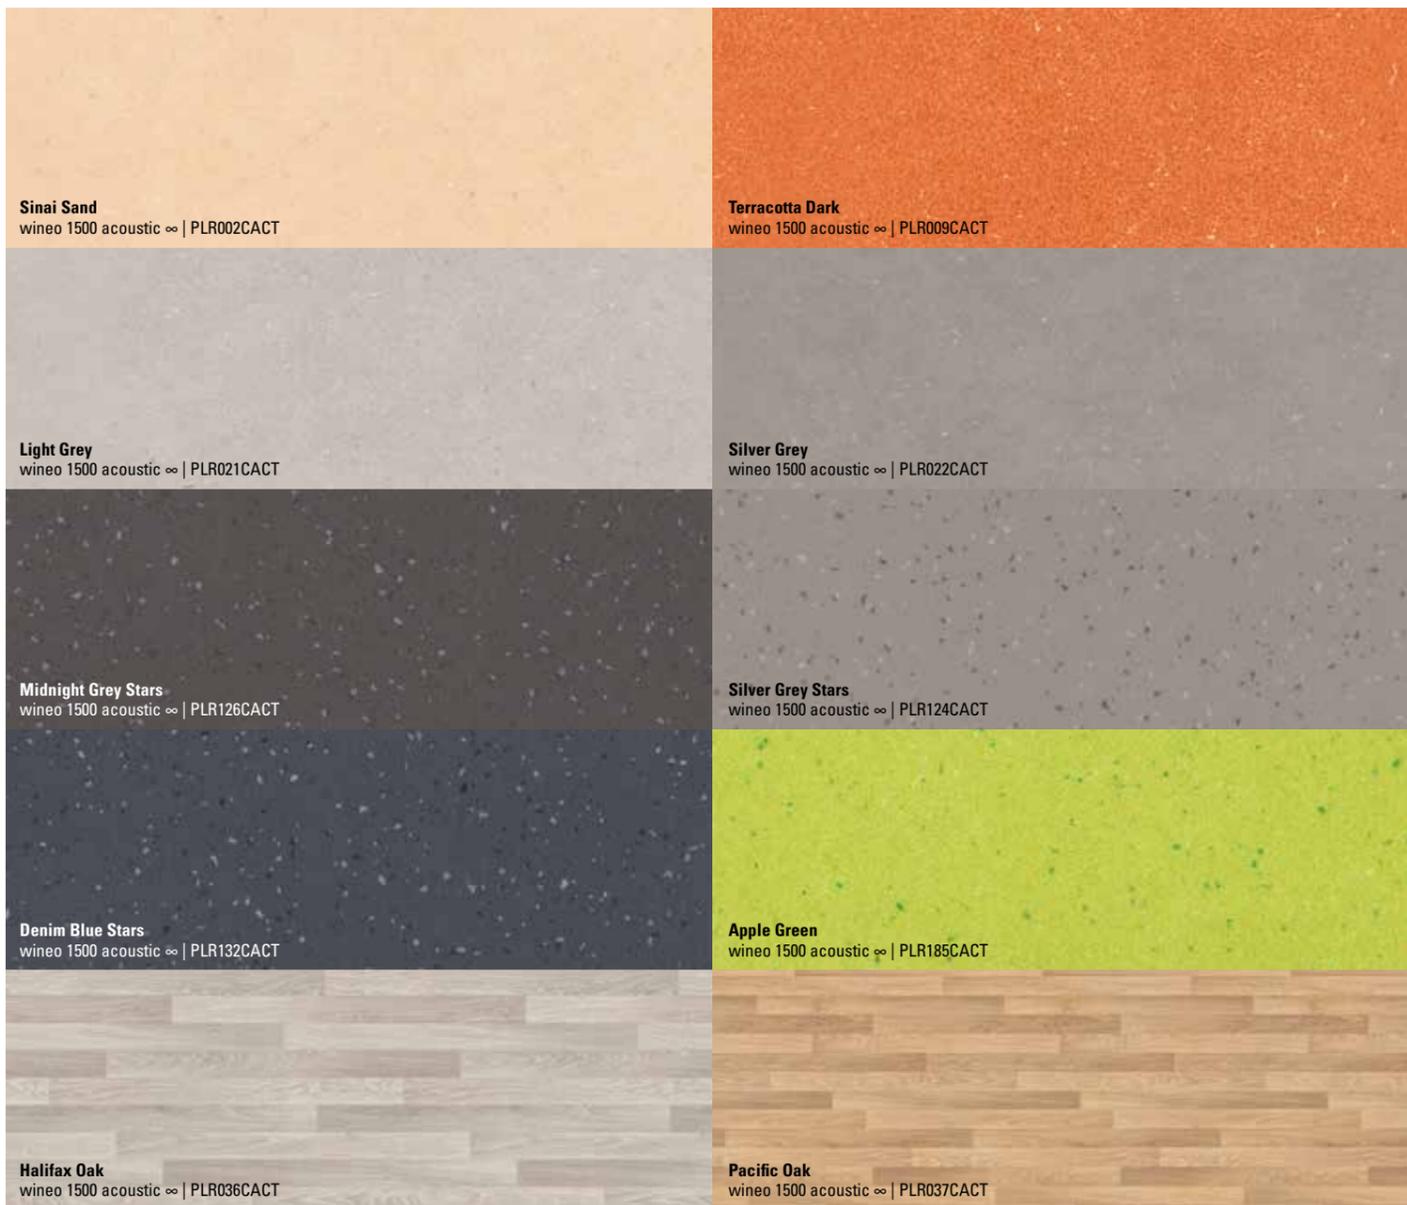

wineo 1500 acoustic ∞



Thanks to the integrated insulation mat in wineo 1500 acoustic ∞, the impact sound is reduced considerably. This makes it particularly suitable for buildings with a high noise level.

You will find the wineo 1500 acoustic ∞ product composition on page 19.

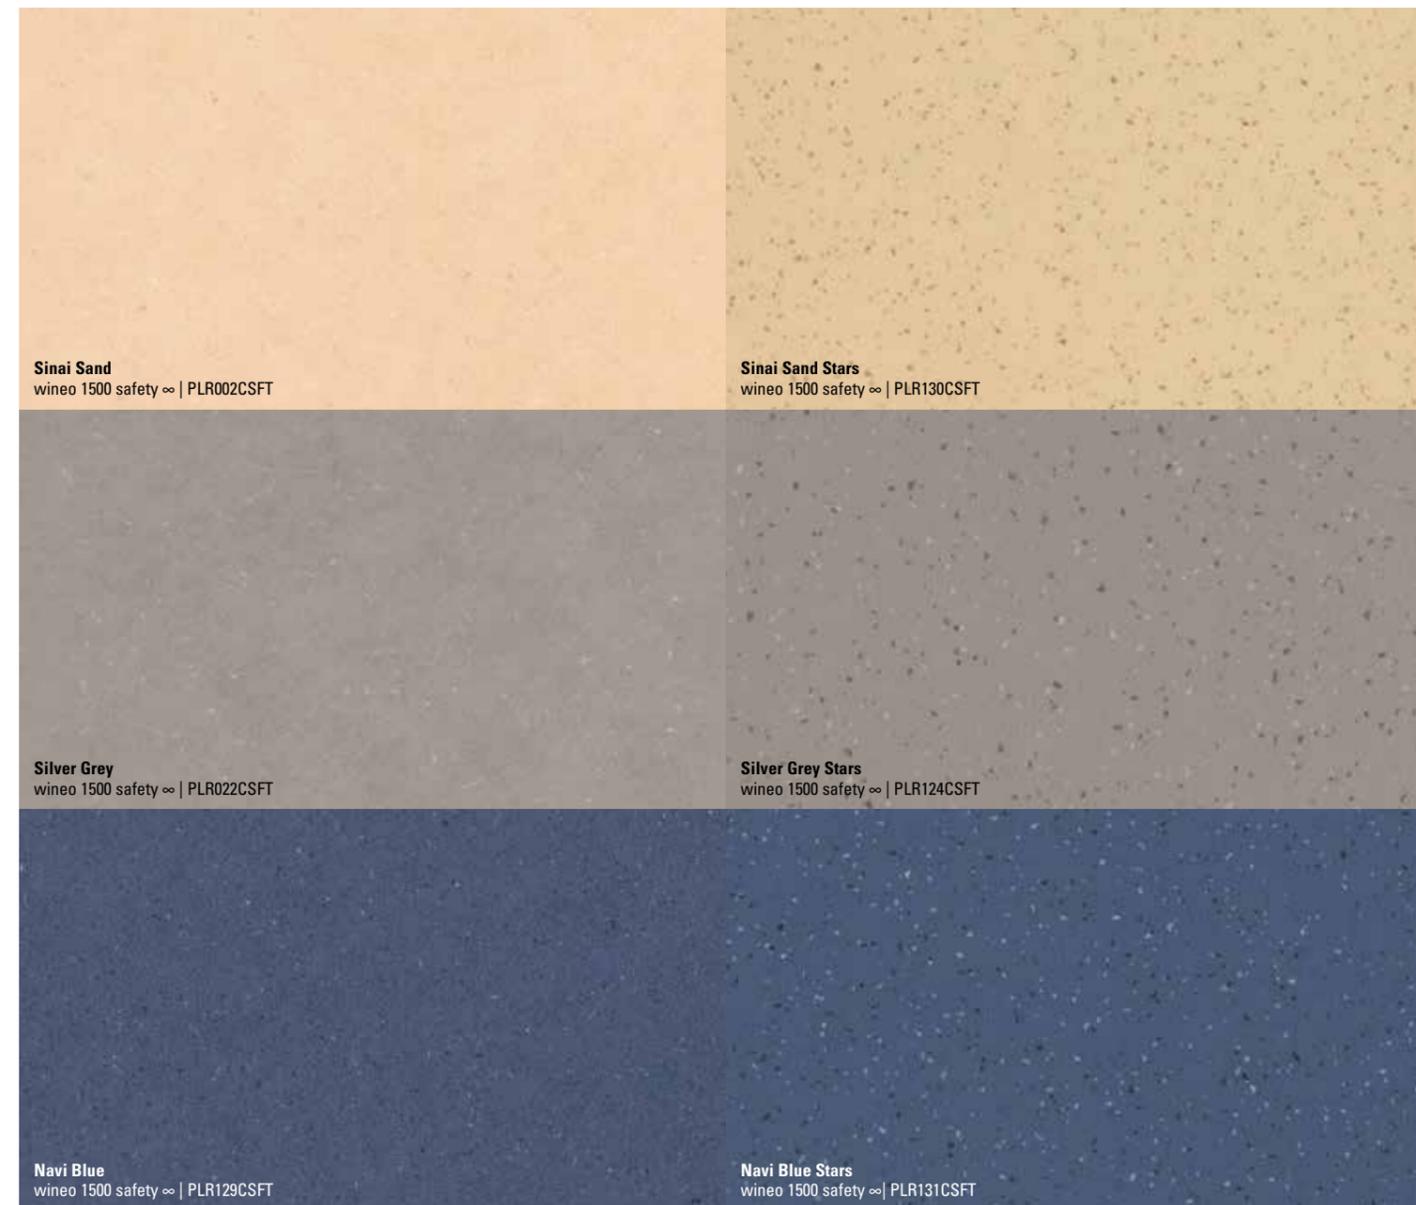


wineo 1500 safety ∞

Whether it's freshly wiped or you are simply in a hurry, wineo 1500 safety ∞ ensures the greatest possible slip resistance with its special surface. It is R10 and A/B certified and is therefore ideal for hotels, hospitals, nursing care facilities, schools or your workplace.

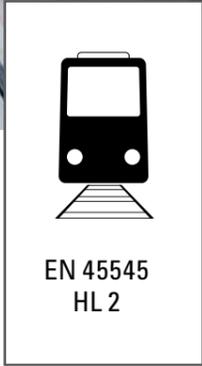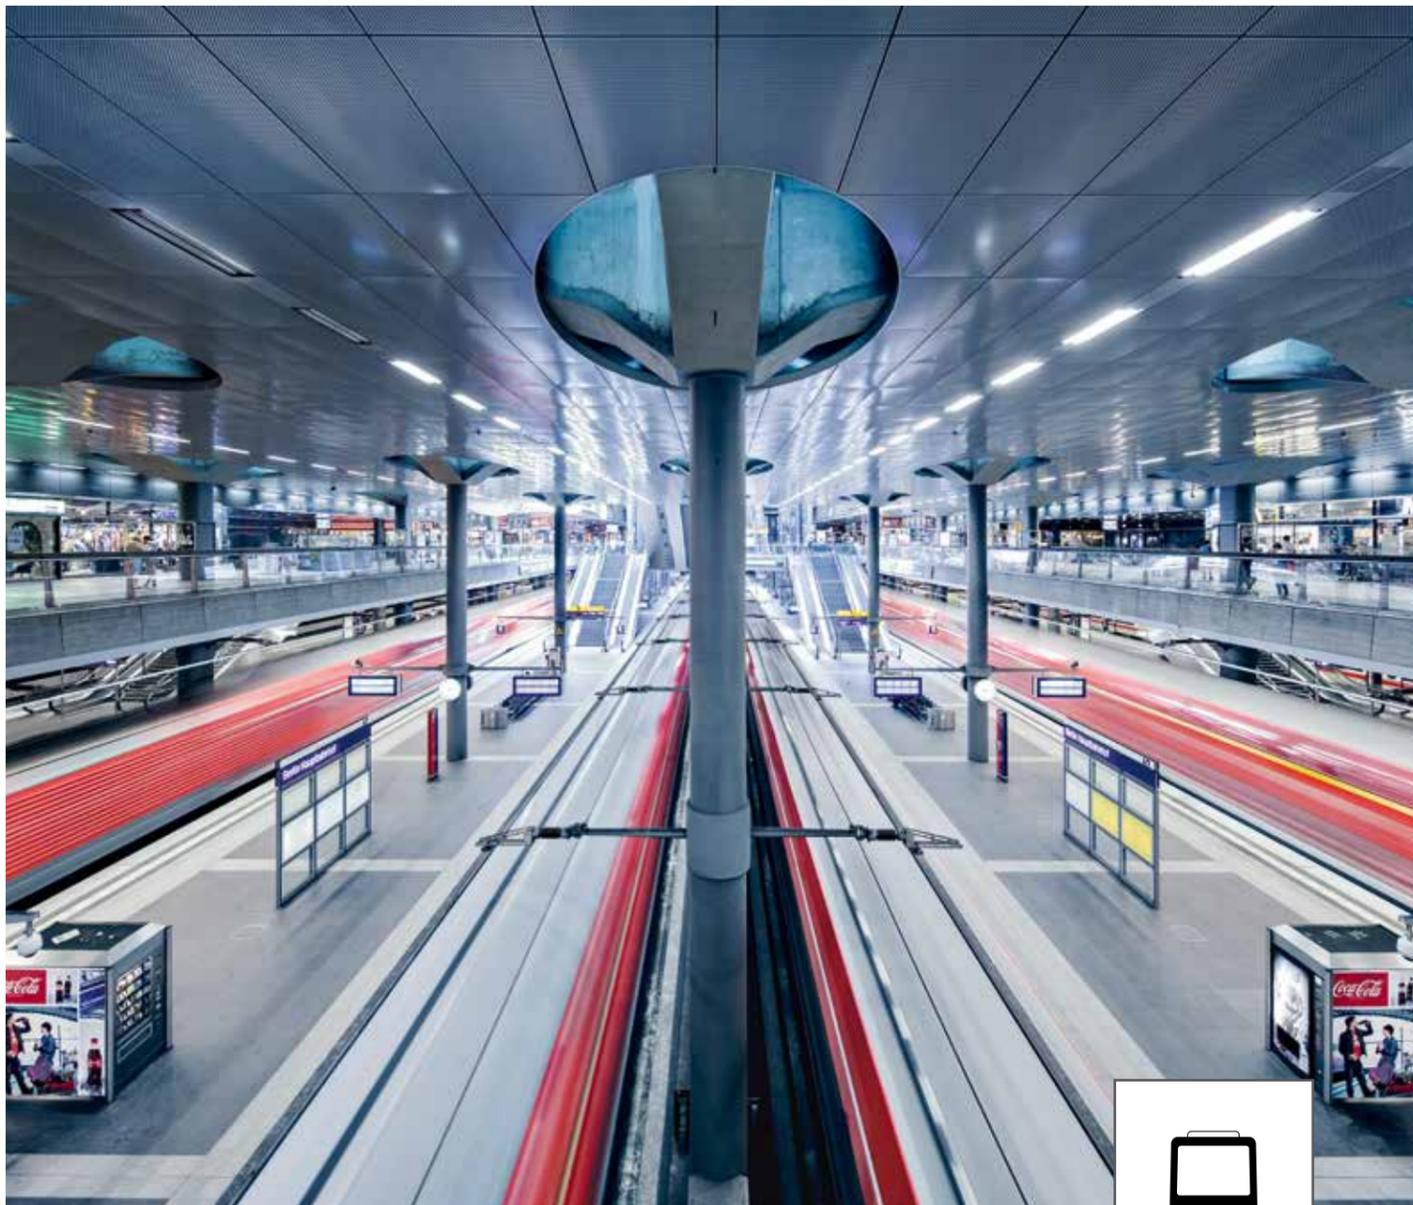

wineo 1500 rail

When thousands of people force themselves through the aisles of a train, that means maximum stress for the materials. To deal with these requirements, we have wineo 1500 rail. It is extremely long-lasting. In doing so, wineo 1500 rail meets all the safety requirements involved.

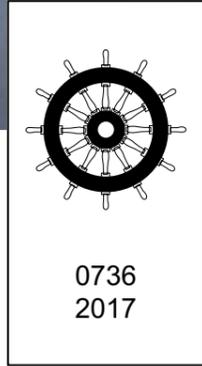


wineo 1500 sea

Modern shipbuilding and progressive offshore facilities require a great deal of technical knowledge as well as reliable and, above all, resilient technologies. With these specific requirements in mind, the flooring brand wineo has developed a special flooring solution: wineo 1500 sea. This product offers ideal attributes in the event of fire and fulfills all safety requirements in accordance with the current IMO regulations.

ACCESSORIES

SKIRTING BOARDS, EXTERNAL CORNERS AND FUSE WIRES

Particularly in sensitive areas such as health and care, in which maximum cleanliness and hygiene are crucial, skirting boards and external corners are indispensable. They connect the wall and the floor perfectly, thereby creating a particularly neat and absolutely impermeable final sealing. Our prefabricated skirting boards and external corners for wineo PURLINE organic flooring are available in every design promoted via the collections and are always manufactured for you on an order basis. The associated PURLINE fuse wires for seamless welding, are also available for every design.

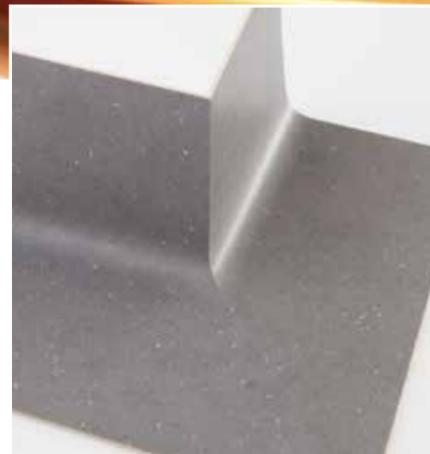

The available dimensions are

skirting boards: 100 mm height x 100 mm depth x 2400 mm length

external corners: 100 mm height x 100 mm depth x 130 mm x 130 mm dimension



PLAIN-COLOURED SKIRTING BOARDS TO MATCH THE DECOR

For wineo 1500, our range of accessories offer suitable skirting boards that are adjusted optimally for the respective decors. Plain-coloured skirting boards that can be combined universally with all designs are also available. You can find information about the suitable skirting board on the preceding collection pages and in our accessories brochure.



Skirting board 14.5/50 Recyclate board
14.5 x 50 x 2400 mm VE = 4 units



All of the white skirting boards can be painted on!

Skirting board 18/115 MDF material
18 x 115 x 2400 mm VE = 5 units



Dark grey
Art. no. 30060434



Light grey
Art. no. 30060433



White
Art. no. 30060432



Black
Art. no. 30011501



Dark grey
Art. no. 30011503



Light grey
Art. no. 30011502



White
Art. no. 30011500

CLIPHOLDER FASTENING SYSTEM

For a quick and uncomplicated assembly of the wineo skirting boards, we recommend the clipholder fastening system. It facilitates invisible cable routing and can be moved without problems if you want to do some painting or wallpapering.



Clipholder
Art. no. 30020241

VE = 30 clips / approx. 15 running metres
Minimum order quantity = 1 VE

SERVICE

We work with distributors, architects, property developers and anyone who appreciates great floor coverings. That's why we offer a wide range of services. If you would like to be kept regularly up to date, just take a look at YouTube, Facebook, Twitter or Pinterest.



TECHNICAL SUPPORT

Do you have any questions about our products, where they can be used or regarding installation? Do not hesitate to contact your distributor, they would be happy to help you



MARKETING SUPPORT

For information and inspiration purposes, we are providing you with an extensive range of patterns and printed matter. You can obtain an overview of all means of presentation from our "VKF" fire brochure **"Advertising with wineo"**. It goes without saying that we can also realise your **individual wishes** through effective coordination. Talk to us about it!



NEWSLETTER

Stay in touch with us: it's easy to sign up for the wineo newsletter on our website. This will guarantee that you don't miss out on anything and will always be kept up to date.

COMPANY BLOG

Get some inspiration and find out even more about our products, references and events. Discover it now at:

blog.wineo.de/en



EN.WINEO.DE

- information and references as well as relevant downloads on the products
- product search by characteristic, colour, format, installation height and utilisation class
- find a retailer
- video portal with plenty of tips and tricks, such as installation instructions

OUR QUALITY PROMISE

For us, outstanding quality means more than an excellent product. That's why we always provide you with the greatest possible level of transparency. And therefore even more safety.

- Many quality controls from the initial mixing of the ingredients to the completion stage
- Traceability of the exact time of production via a reverse-side overprint
- Outstanding attributes regarding durability, maintenance and safety

wineo

Controlled quality

From the raw materials supplier to the finished, packed product – wineo flooring must satisfy the most stringent requirements and go through an intensive quality-assurance process. Seven-stage quality control guarantees that our excellent and multiple award-winning quality will continue to set standards in the future as well.

High level of responsibility

As a family-run company in its third generation, we carry a high level of social and ecological responsibility. The consistent availability of goods, intensive application and market support, competent advice and permanent new and further development are typical of wineo and create trust and security among our market partners around the world.

MADE IN GERMANY



Der Blaue Engel

"Der Blaue Engel" guarantees that our products and services fulfill high standards with regard to their environmental, health-related and consumer-friendly characteristics. For every product group, criteria were established which are checked by the German Federal Environmental Agency every three to four years.




TFI-TÜV PROFICERT

The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk.



KFB

Award from the competence centre for dynamic processes at Bielefeld University of Applied Sciences (FH). The flooring product Purline has passed the dynamic standard examination of rolling behaviour in accordance with the KFB roadmap.



Österreichisches Umweltzeichen

The "Österreichisches Umweltzeichen" (Austrian eco-label) assesses products from quality, health-related and ecological standpoints. Basically, products can be certified only if they are harmless health-wise. The fulfilment of the criteria is checked every four years. Materials, solvent emissions, presence of environmentally and health-damaging substances, health-damaging components, emission of heavy metals and other damaging substances.



A+

Just like the "Blue Angel" in Germany, the A+ seal identifies our products as ecological, healthy and user-friendly in the French market.



M1

Just like the "Der Blaue Engel" (Blue Angel) quality mark in Germany, the M1 seal in the Finnish market labels our products as environmentally friendly, health-friendly and consumer-friendly. The focus is on emissions of Volatile Organic Compounds (VOCs).



GREENGUARD

The Greenguard certificate ensures that a product fulfills the strictest and most comprehensive requirements for emissions of Volatile Organic Compounds (VOCs) into the air.

COLLECTION OVERVIEW

Collection	chip fusion wood safety	acoustic	wood XS	wood L	wood XL	stone XL fusion XL
Installation type	 Glue	 Glue	 Glue	 Glue	 Glue	 Glue
Utilisation classes EN ISO 10874	23/34/43	23/34/41	23/34/43	23/34/43	23/34/43	23/34/43
Format	20 × 2 m	20 × 2 m	600 × 100 mm	1200 × 200 mm	1500 × 250 mm	1000 × 500 mm
Product thickness	2.5 mm	4 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm
Weight	3.6 kg/m ²	4.2 kg/m ²	3.9 kg/m ²	3.9 kg/m ²	3.9 kg/m ²	3.9 kg/m ²
Content / box	1/40 m ²	1/40 m ²	28/1.68 m ²	20/4.8 m ²	12/4.5 m ²	10/5 m ²
Boxes / pallet	6/240 m ²	6/240 m ²	144/241.92 m ²	48/230.4 m ²	52/234 m ²	50/250 m ²
Immunity to stains / Chemical resistance EN ISO 26987	very good resistance with regards to concentration and exposure time					
Reaction to fire EN 13501-1	C _{fi} - s1					
Anti slip category DIN 51130	R9 (safety R10)					
Light fastness EN ISO 105-B02	≥ 7					
Residual indentation EN ISO 24343-1	~ 0.05 mm	~ 0.15 mm	~ 0.05 mm	~ 0.05 mm	~ 0.05 mm	~ 0.05 mm
Slip resistance EN 13893	μ ≥ 0,30 DS					
Dimensional stability EN ISO 23999	~ 0.05 %	~ 0.10 %	~ 0.10 %	~ 0.10 %	~ 0.10 %	~ 0.10 %
Flexural behaviour EN ISO 24344	< 20 mm					
Underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.					
Thermal resistance ISO 8302	~ 0.01 (m ² K)/W	~ 0.041 (m ² K)/W	~ 0.01 (m ² K)/W	~ 0.01 (m ² K)/W	~ 0.01 (m ² K)/W	~ 0.01 (m ² K)/W
Effect of a castor chair EN 425 / ISO 4918	Type W					
Impact sound reduction EN ISO 10140	~ 4 dB	~ 17 dB	~ 4 dB	~ 4 dB	~ 4 dB	~ 4 dB
Effect of a furniture leg EN 424	without damages					
Classification of group of wear reaction EN 660-2	Group T					
Anti-static characteristics EN 1815	≤ 2 kV					
Guarantee can be found on:	www.wineo.de/service/garantien					



Utilisation class 23:
Heavy-duty use
in the domestic area



Utilisation class 41:
Medium use
in the light industrial sector
(vehicular traffic excluded)



Utilisation class 34:
Very heavy-duty use
in the commercial sector



Utilisation class 43:
Heavy-duty use
in the light industrial sector

Windmüller GmbH

Nord-West-Ring 21

D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0

Fax: +49 (0) 52 37 609 - 309

info@wineo.de

www.wineo.de

Member of



Handed over by:

Product no. 20090978 | 01/2018

wineo